


Złącze kolankowe redukcyjne

Wartości ciśnień dla złączki DLR znajdują się w tabeli nr 22 na stronie 14

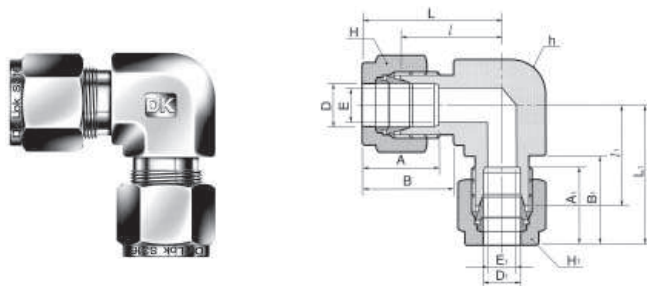

Połączenie rur calowych DLR-...

| Kod | Śr. zewn. rury | | | | Odległość powierzchni płaskich | | | | | | E | E ₁ | A | A ₁ | B | B ₁ | l | l ₁ | L | L ₁ |
|---------|----------------|----------------|------|------|--------------------------------|-------|----------------|-------|-------|-------|-------|----------------|-------|----------------|-------|----------------|-------|----------------|-----|----------------|
| | D | D ₁ | h | | H | | H ₁ | | | | | | | | | | | | | |
| | in | mm | in | mm | in | mm | in | mm | in | mm | in | mm | in | mm | in | mm | in | mm | in | mm |
| DLR 2-1 | 1/8 | 3.17 | 1/16 | 1.59 | 3/8 | 9.52 | 7/6 | 11.11 | 5/16 | 7.93 | 12.7 | 2.4 | 8.63 | 15.24 | 10.93 | 15.74 | 14.2 | 22.35 | 1.3 | 18.0 |
| DLR 4-2 | 1/4 | 6.35 | 1/8 | 3.17 | 1/2 | 12.7 | 9/16 | 14.28 | 7/6 | 11.11 | 15.24 | 4.8 | 12.7 | 17.78 | 15.24 | 19.55 | 17.9 | 26.92 | 2.4 | 24.5 |
| DLR 6-4 | 3/8 | 9.52 | 1/4 | 6.35 | 5/8 | 15.87 | 11/16 | 17.46 | 9/16 | 14.28 | 16.76 | 7.1 | 15.24 | 19.3 | 17.78 | 23.1 | 21.92 | 30.47 | 4.8 | 29.29 |
| DLR 8-4 | 1/2 | 12.7 | 1/4 | 6.35 | 13/16 | 20.64 | 7/8 | 22.22 | 9/16 | 14.28 | 22.86 | 10.41 | 15.24 | 21.84 | 17.78 | 25.9 | 24.4 | 36.06 | 4.8 | 31.77 |
| DLR 8-6 | 1/2 | 12.7 | 3/8 | 9.52 | 13/16 | 20.64 | 7/8 | 22.22 | 11/16 | 17.46 | 22.86 | 10.41 | 16.76 | 21.84 | 19.30 | 25.9 | 25.9 | 36.06 | 7.1 | 33.27 |


Połączenie rury metrycznej z rurą calową DLR-...M

| Kod | Śr. zewn. rury | | | Odległość pow. płaskich | | | | | E | E ₁ | A | A ₁ | B | B ₁ | l | l ₁ | L | L ₁ |
|----------|----------------|----------------|------|-------------------------|-------|----|------|----------------|-----|----------------|------|----------------|------|----------------|------|----------------|------|----------------|
| | D | D ₁ | | h | | H | | H ₁ | | | | | | | | | | |
| | in | mm | | in | mm | mm | in | mm | in | mm | in | mm | in | mm | in | mm | in | mm |
| DLR 8M-4 | 8 | 1/4 | 6.35 | 9/16 | 14.28 | 16 | 9/16 | 14.28 | 6.4 | 4.8 | 16.2 | 15.24 | 18.6 | 17.78 | 21.3 | 20.6 | 28.7 | 28.0 |

DXR

Złącze krzyżowe redukcyjne

Wartości ciśnień dla złączki DXR znajdują się w tabeli nr 22 na stronie 14

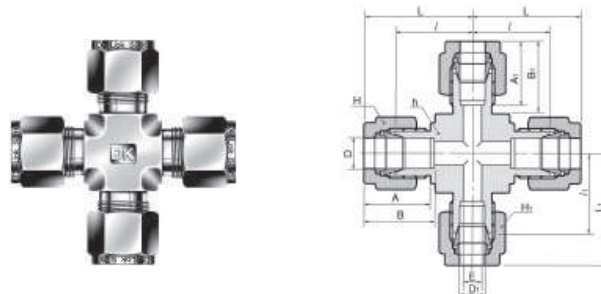

Połączenie rur calowych DXR-...

| Kod | Port 1 | Port 2 | Port 3 | Port 4 | E | Odległość pow. płaskich | | | | | | A | A ₁ | B | B ₁ | l | l ₁ | L | L ₁ |
|---------------|--------|----------------|--------|--------|-----|-------------------------|-------|----------------|-------|-------|-------|-------|----------------|-------|----------------|-------|----------------|-------|----------------|
| | D | D ₁ | h | | | H | | H ₁ | | | | | | | | | | | |
| | in | mm | in | mm | min | in | mm | in | mm | in | mm | in | mm | in | mm | in | mm | in | mm |
| DXR 12-12-6-6 | 3/4 | 19.05 | 3/8 | 9.52 | 7.1 | 1-1/16 | 26.98 | 1-1/8 | 28.57 | 11/16 | 17.46 | 24.38 | 16.76 | 21.84 | 19.3 | 29.71 | 29.71 | 39.87 | 37.07 |

Połączenie rur metrycznych DXR-...M

| Kod | Port 1 | Port 2 | Port 3 | Port 4 | E | Odległość pow. płaskich | | | | | | A | A ₁ | B | B ₁ | l | l ₁ | L | L ₁ |
|------------------|--------|----------------|--------|--------|-----|-------------------------|------|----------------|----|----|----|------|----------------|----|----------------|------|----------------|------|----------------|
| | D | D ₁ | h | | | H | | H ₁ | | | | | | | | | | | |
| | in | mm | in | mm | min | in | mm | in | mm | in | mm | in | mm | in | mm | in | mm | in | mm |
| DXR 16M-6M-6M-6M | 16 | | 6 | | 4.8 | | 25.4 | | 25 | | 14 | 24.4 | 15.3 | 22 | 17.7 | 28.7 | 27.2 | 38.8 | 34.6 |